



Mendon Center Road Rehabilitation

Tom Frys, Monroe County DOT
Karen Cox, Monroe County DOT
Thomas Polech, Monroe County DOT
Wade Daley, LaBella Associates
Curt Ecklund, LaBella Associates

Public Information Meeting

March 5, 2018
7:00 - 8:30 pm
Pittsford Community Library
Fisher Meeting Room



Project Limits

- Canfield Road to Calkins Road
- Project length is 2.5 miles
- Approximately 50 feet down side streets

Pavement Widths

- Existing paved width – 24’ to 25’ 11’ travel lanes, 1’ to 2’ shoulders
- Proposed pavement width – 34’ 11’ travel lanes, 6’ shoulders

Proposed Pavement Improvements

- Mill & overlay the existing asphalt pavement
- Construct new 6’ wide shoulders
- Hold existing centerline and widen equally on each side of the roadway
- Construct new driveway aprons to tie into new shoulder elevation


Proposed Drainage Improvements

- Construct new roadside swales
- Repair / replace cross culverts
- Replace driveway culverts

Traffic Control

- Daily lane closures with alternating one-way traffic
- Access to all properties and side roads will be maintained during construction
- Coordination with Town, schools & emergency responders

Anticipated Project Schedule

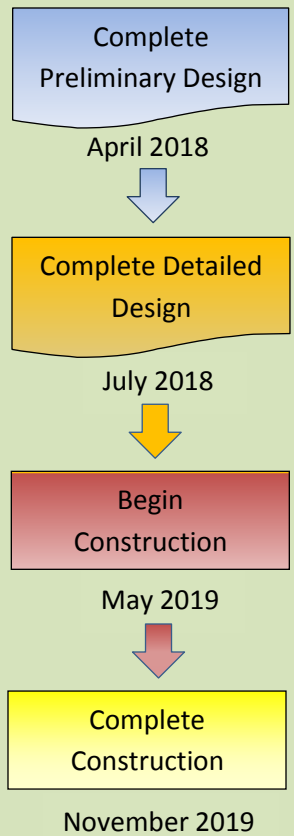

Contact

Karen Cox, P.E.
Monroe County DOT
City Place – Suite 6100
50 West Main Street
Rochester, NY 14614

(585) 753-7742
kcox@monroecounty.gov

Estimated Project Cost

\$4.250 Million
Project is 100% funded by Monroe County



Monroe County Department of Transportation

Mendon Center Road Rehabilitation

